



TOTAL WEIGHING SOLUTION™

KK-300H series | Bench Scale

Crane series



...Clearly a Better Value




Warranty - Two Years



...Clearly a Better Value


A Multifunction Scale that doesn't just weigh!

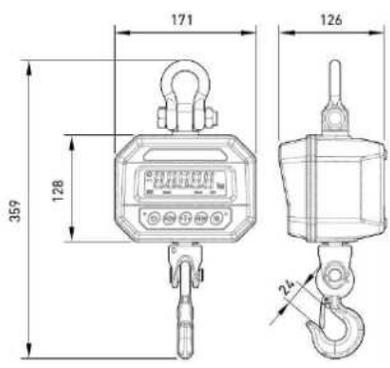

TB-5T



TB-10T

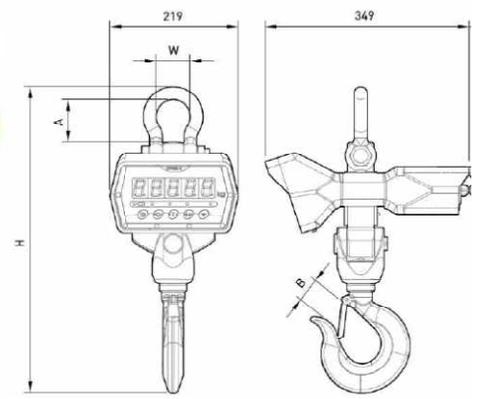

TA-100, 500



TA-200



TF-100 (Option)



TF-100 (Option)

MODEL	DIMENSION			
	H	A	W	B
TB-1T	407	62	50	25
TB-3T	518	73	57	34
TB-5T	525	73	57	40
TB-10T	679	101	83	55



Three Types of Display



Designed for dependability and durability at a practical price!

STAINLESS STEEL WASHDOWN SCALES



Features

- Dual Range - 4 Capacities Available
- High resolution for accurate weighing/counting
- Simple and easy operation (9 large function keys)
- Counting & percentage mode
- Accumulation mode
- Weight/Count/Percentage comparison function (HI/OK/LO) with alarm beeps
- RS-232C interface (PC/Printer)
- Rechargeable battery
- Battery Saver w/Auto Power Off


- Backlight LCD
- Options: DLP-50 Label Printer
DEP-50 Receipt Printer
Dust Protection Cover
- Legal for Trade - COC # 09-072
* Counting feature not legal for trade

MODEL	DIMMENSION			
	H	A	W	B
TB -1T	407	62	50	25
TB -3T	518	73	57	34
TB-5T	525	73	57	40
TB -10T	679	101	83	55




The ED Series is an advanced multifunction scale, from checkweighing to counting...




Labels & Receipt Samples

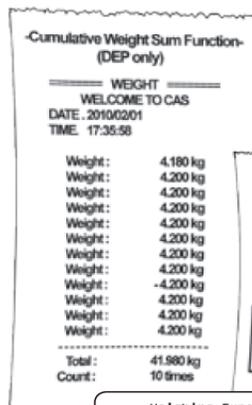

DEP-50 Receipt Printer



Dimensions

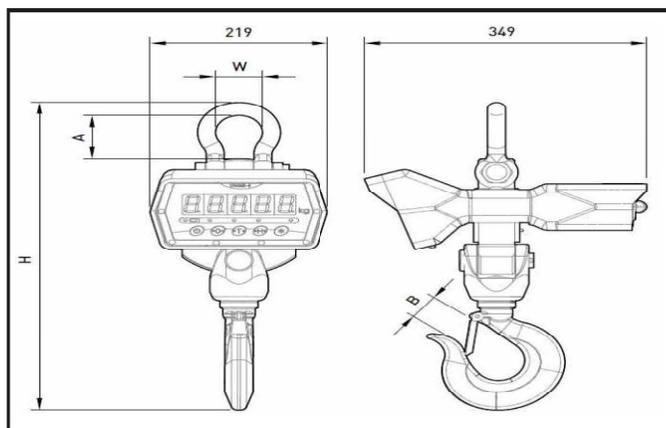

Capacity	100kg	200kg	0 ~ 250kg / 250 ~ 500kg
Division	0.05kg	0.1kg	0.1kg / 0.2kg
Max. Tare Weight	100kg	200kg	500kg
Case Material	Engineering plastic	Engineering plastic	Engineering plastic
Weight	2.5kg	2.5kg	2.5kg
Operating Time	Approx.350hr		
Display	5 digit, 20mm LCD		
Water proof Level	IP65		
Temperature	-10°C ~ 40°C		
Keypad	Power , Zero , Tare , Hold , * (Back Light)		
Display Lamp	Low Battery, Zero, Tare, Hold, Stable		
Parts	Charging Adaptor, Infrared controller		
Battery	Lithium Polymer		
Charging Adaptor	DC 5V, 1A SMPS		

Display Designators	STABLE, ZERO, NET, SUM, LO, OK, HI, pcs, lb, oz, g, kg, %, LACK OF UNIT
Zero Range	+/- 2%
Tare Range	Full Capacity by Subtraction
Power	AC adapter DC 12V/1A or 12V/800mA
	Internal rechargeable sealed acid battery - 6V DC
Battery Life	170 hours (without backlight)
Product Size (inch/mm)	13(W) x 13.6(D) x 4.2(H) / 330(W) x 346(D) x 107(H)
Platter Size (inch/mm)	12(W) x 8.75(D) / 300(W) x 222(D)
Operating Temp	-10°C ~ 40°C / 14°F ~ 104°F
Product Weight	9.9 lbs/4.5 kg

Panasonic
KENKO



...Clearly a Better Value

Panasonic Kenko Electric Co, Ltd
36 Sisenju, Okio, Osaka 234-23354 Japan
Tel. 81-32-565434667

SNI

Specifications subject to change without notice

KAN